
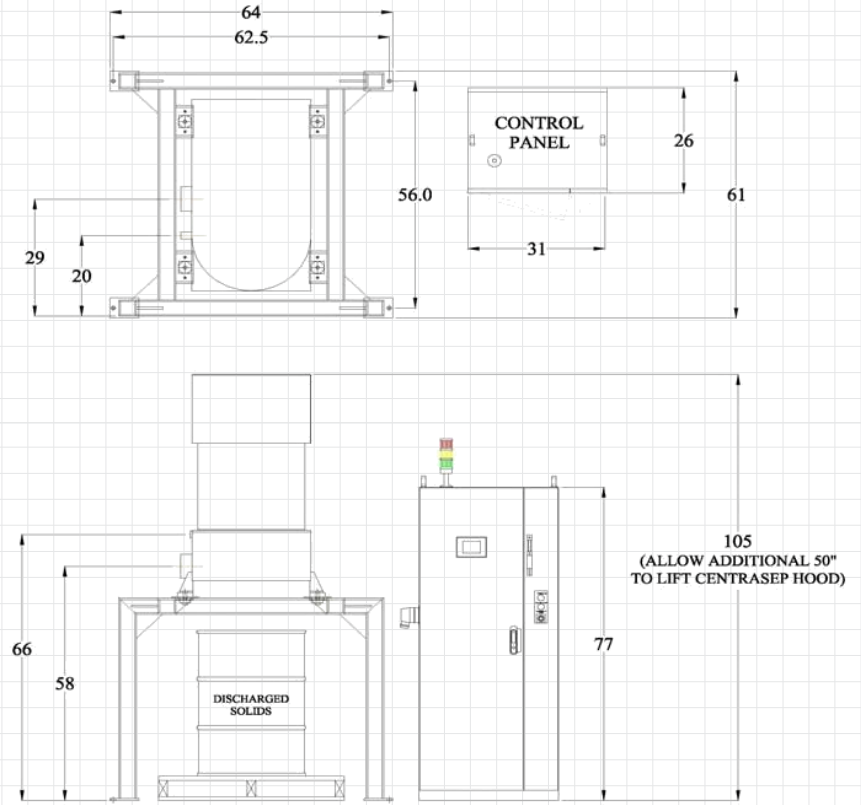


CentraSep[®] S-126

Dimensions and Specifications

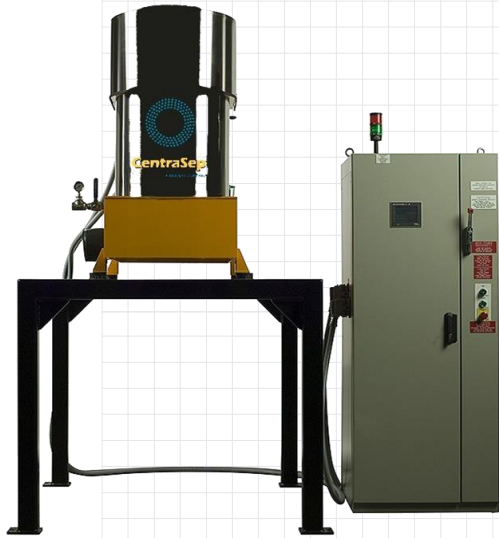

| | |
|----------------------|--|
| STAND | Carbon Steel, 4" tube |
| HOUSING | 316 Stainless Steel; All wetted parts |
| ROTOR | 316 Stainless Steel |
| SCRAPER BLADE | 316 Stainless Steel 4-Blade |

| | |
|-----------------------------|--|
| STAND | 5' L, 5' W, 50" H, 3/8 Wall |
| CENTRASEP | 47.25" L, 27" W, 53.75" H Powder Coated |
| CLEAN DISCHARGE PORT | 6" Tube, 58" to Centrline from Floor |
| DIRTY FEED PORT | 1" NPT, 66" to Centerline from Floor |

| | |
|--------------------------------|--------------------------------------|
| MODEL NUMBER | CentraSep [®] S-126 |
| ROTOR SPEED | Variable to 3,000 RPM |
| GRAVITY FORCE | Variable to 2012 G's |
| SOLIDS HOLDING CAPACITY | 6.34 Gallons |
| ELECTRICAL MOTOR | 10HP, TEFC, Hostile Duty |
| ELECTRICAL SERVICE | 480 Volt, 3 Phase, 30 Ampere |
| CONTROL PANEL | NEMA 12 |
| PLC | Allen-Bradley |
| AC DRIVE | ABB ACS 800 Direct Torque Control |
| AIR REQUIREMENTS | 3 SCFM, 60 PSI Shop Air |
| NOISE LEVEL | < 85 dB |