
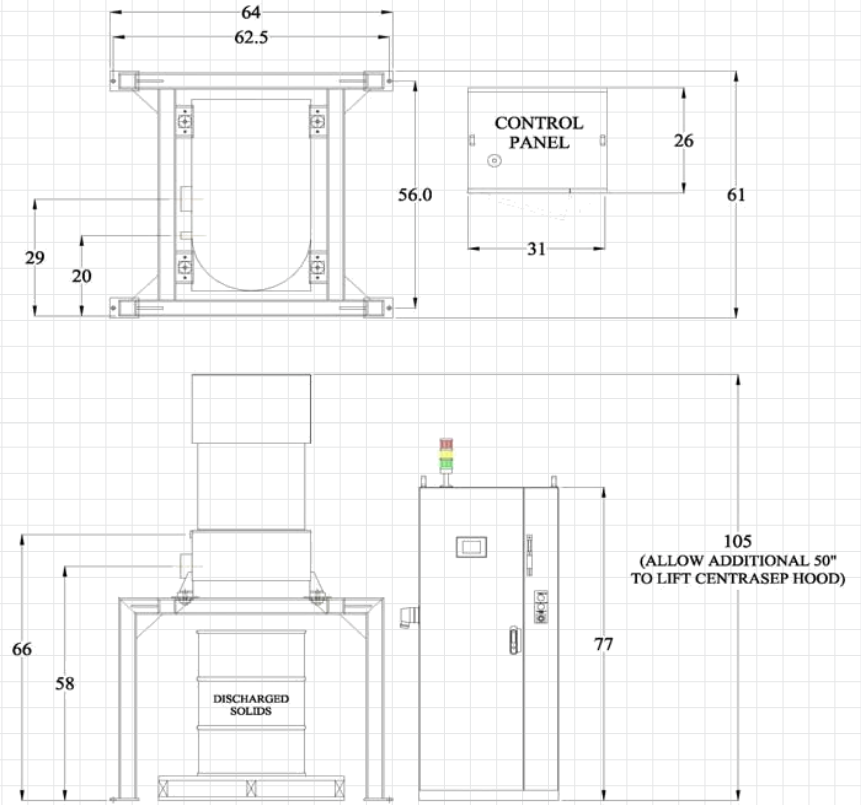


CentraSep[®] S-126

Dimensions and Specifications

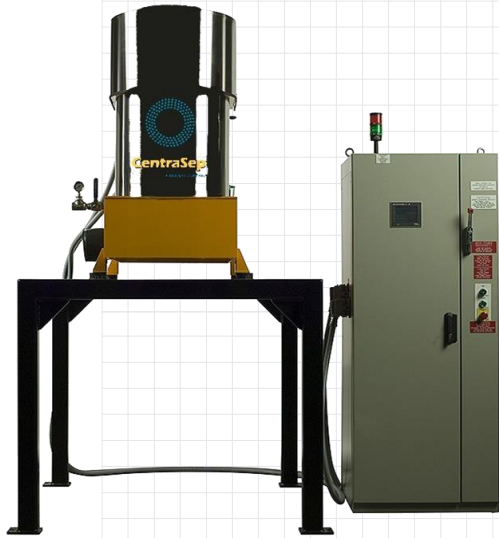

STAND	Carbon Steel, 4" tube
HOUSING	316 Stainless Steel; All wetted parts
ROTOR	316 Stainless Steel
SCRAPER BLADE	316 Stainless Steel 4-Blade

STAND	5' L, 5' W, 50" H, 3/8 Wall
CENTRASEP	47.25" L, 27" W, 53.75" H Powder Coated
CLEAN DISCHARGE PORT	6" Tube, 58" to Centerline from Floor
DIRTY FEED PORT	1" NPT, 66" to Centerline from Floor

MODEL NUMBER	CentraSep [®] S-126
ROTOR SPEED	Variable to 3,000 RPM
GRAVITY FORCE	Variable to 2012 G's
SOLIDS HOLDING CAPACITY	6.34 Gallons
ELECTRICAL MOTOR	10HP, TEFC, Hostile Duty
ELECTRICAL SERVICE	480 Volt, 3 Phase, 30 Ampere
CONTROL PANEL	NEMA 12
PLC	Allen-Bradley
AC DRIVE	ABB ACS 800 Direct Torque Control
AIR REQUIREMENTS	3 SCFM, 60 PSI Shop Air
NOISE LEVEL	< 85 dB